



FLOWCHEM

Corrosion Protection:

- ✓ Chemical Processing
- ✓ Chemical Storage
- ✓ Tank Linings
- ✓ Wastewater Treatment
- ✓ Plant Rooms



Welcome to Flowcrete Americas

Flowcrete is a world leader in the manufacture of seamless resin flooring systems for application in both industrial and commercial environments.

Flowcrete Americas has a fresh approach to flooring and is constantly looking to introduce world-class systems, which offer clients a number of performance advantages while at the same time make floors much more than a surface to walk on.

Flowcrete Americas is dedicated to innovating sustainable flooring materials and using the earth's natural resources responsibly across all operations to ensure a more positive impact on the construction industry and a greener world at our feet.

The company's headquarters in Texas serves expanding business opportunities across the continent including the USA, Canada, Latin America and the Caribbean. With key clients including Coca Cola, Ocean Spray, Cargill, Nestlé, Frito Lay, Diageo and Samuel Adams, Flowcrete Americas continues to develop a significant presence in the Americas' polymer flooring market.

Anti-Corrosion Coatings & Linings



Damage caused by corrosive materials may not always be visible to the eye, but can lead to structural failure or public safety risks.

Anti-corrosion coatings and linings protect metal and concrete surfaces and structures, acting as a barrier to inhibit the contact between chemical compounds or corrosive materials.

Corrosion resistant coatings also provide enhanced temperature and abrasion resistance as well as reduced shrinkage, durability and excellent bond strength - all without cracking or crazing.

Flowchem is a range of seamless anti-corrosion coating and lining systems designed to offer superior protection against highly concentrated acidic, alkali and caustic materials.

Comparative Performance of Resin Chemistries

Chemical Resistance (Intermittent Spillages)*:

	CEMENT BASED	EPOXY	POLYURETHANE	VINYL ESTER
Acetic Acid - 30% at 70°F			✓	✓
Acetic Acid (glacial) - 100% at 105°F				✓
Citric Acid - 30% at 70°F		✓	✓	✓
Citric Acid - 100% at 210°F				✓
Hydrochloric Acid - 10% at 70°F			✓	✓
Hydrochloric Acid - 37% at 175°F				✓
Lactic Acid - 10% at 70°F		✓	✓	✓
Lactic Acid - 100% at 210°F				✓
Nitric Acid - 10% at 70°F			✓	✓
Nitric Acid - 50% at 70°F				✓
Sodium Hydroxide - 50% at 70°F	✓	✓	✓	✓
Sodium Hydroxide - 50% at 175°F				✓
Sulfuric Acid - 20% at 70°F		✓	✓	✓
Sulfuric Acid - 75% at 70°F				✓
Ethanol, Butane and Methanol	✓		✓	✓
Sugars		✓	✓	✓

Service Conditions:

	CEMENT BASED	EPOXY	POLYURETHANE	VINYL ESTER
Steam Cleaning	✓		✓ (3/8")	✓
Maximum Temperature	390°F	140°F	250°F (3/8")	290°F - 350°F
Ultimate Compressive Strength	7,250 psi	8,750 psi	10,000 psi	17,500 psi

Flowchem Application Suitability



Floors



Walls & Ceilings



Structural Steelwork



Equipment Bases



Tank Linings



Trenches & Drains

*A full chemical resistance chart is available on request.

Flowchem VE RC (40 mils)

A horizontal and vertical roller applied vinyl ester coating with excellent chemical resistance.

Flowchem VE RC offers corrosion protection for concrete walls, floors, curbs, equipment bases, trenches and drains.



Temperature Resistant:

Resistant to intermittent temperatures of up to 350°F.



Chemical Resistant:

Protects against a variety of aggressive acids, solvents caustics and chemicals.



Bond Strength:

Elastomer modified resin provides superior adhesion.



Fast Cure:

Accelerated cure time, providing an operational surface in just 12 hours.




Abrasion Resistant:

Excellent abrasion and wear resistance under heavy traffic conditions.

Standard Colors:



Red



Gray

Application Suitability:

Storage and Warehousing	✓
Metal Tank Linings	✓
Dry Powder Processing	✓
Solvent Handling and Storage	✓
Plant and Battery Rooms	✓

The applied colors may differ from the examples shown.
For a full color chart and samples, contact your local Flowcrete office.

Technical Profile

TEMPERATURE RESISTANCE:

ASTM D3299	Continuous Exposure: 320°F
	Intermittent Spills: 350°F

COMPRESSIVE STRENGTH:

ASTM C 579	17,500 psi
------------	------------

TENSILE STRENGTH:

ASTM D 638	5,300 psi
------------	-----------

FLEXURAL STRENGTH:

ASTM C 580	8,200 psi
------------	-----------

BARCOL HARDNESS:

ASTM D 2583	>35
-------------	-----

FLEXURAL MODULUS OF ELASTICITY:

ASTM C 580	10.9 x 10 ⁵ psi
------------	----------------------------

ADHESION:

ASTM D 4541	>400 psi (100% Concrete Failure)
-------------	-------------------------------------

POT LIFE:


45+ minutes at 75° F

PERMEABILITY:

ASTM E 96	0.0042 perm. -in
-----------	------------------

SPEED OF CURE:

	60°F	75°F	90°F
Light Traffic	18 hrs	12 hrs	8 hrs
Full Traffic	36 hrs	24 hrs	16 hrs
Full Chemical Cure	72 hrs	48 hrs	24 hrs

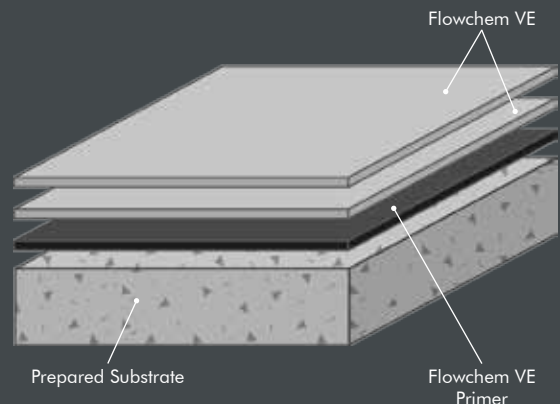



Performance Benefits

- | | |
|---|--|
| ✓ | Exceptional chemical resistance |
| ✓ | Low-shrink to reduce stress |
| ✓ | Withstands temperatures up to 350°F |
| ✓ | Coatings can be applied to a range of substrates |
| ✓ | Vertical systems available for tanks and silos |
| ✓ | Abrasion and impact resistance |
| ✓ | Thermal shock and cycling resistance |
| ✓ | UV stable options available |
| ✓ | Fast cure systems minimize downtime |
| ✓ | Easy to clean and maintain |

Flowchem VE BC

(60, 75 & 125 mils)

A horizontal and vertical applied vinyl ester coating containing broadcast aggregates.

Flowchem VE BC offers hardwearing corrosion protection for concrete walls, floors, curbs, equipment bases, trenches and drains.



Temperature Resistant:

Resistant to intermittent temperatures of up to 350°F.



Chemical Resistant:

Protects against a variety of aggressive acids, solvents caustics and chemicals.



Bond Strength:

Elastomer modified resin provides superior adhesion.



Fast Cure:

Accelerated cure time, providing an operational surface in just 12 hours.




Versatile:

Enhanced impact and wear resistance with a textured slip resistant profile.

Standard Colors:



Red



Gray

Application Suitability:

Waste Water Treatment	✓
Metal Tank Linings	✓
Liquid Processing	✓
Dry Powder Processing	✓
Solvent Handling and Storage	✓

The applied colors may differ from the examples shown.
For a full color chart and samples, contact your local Flowcrete office.

Technical Profile

TEMPERATURE RESISTANCE:

ASTM D3299	Continuous Exposure: 320°F
	Intermittent Spills: 350°F

COMPRESSIVE STRENGTH:

ASTM C 579	17,500 psi
------------	------------

TENSILE STRENGTH:

ASTM D 638	5,300 psi
------------	-----------

FLEXURAL STRENGTH:

ASTM D 790	5,800 psi
------------	-----------

BARCOL HARDNESS:

ASTM D 2583	>35
-------------	-----

FLEXURAL MODULUS OF ELASTICITY:

ASTM D 790	15.3 x 10 ⁵ psi
------------	----------------------------

ADHESION:

ASTM D 4541	>400 psi (100% Concrete Failure)
-------------	-------------------------------------

POT LIFE:


45+ minutes at 75° F

PERMEABILITY:

ASTM E 96	0.0042 perm. -in
-----------	------------------

SPEED OF CURE:

	60°F	75°F	90°F
Light Traffic	18 hrs	12 hrs	8 hrs
Full Traffic	36 hrs	24 hrs	16 hrs
Full Chemical Cure	72 hrs	48 hrs	24 hrs

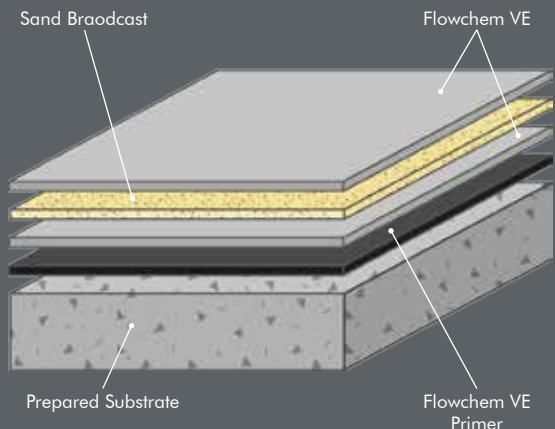

Flowchem VE GL (125 mils)

A glassfiber reinforced horizontal and vertical applied vinyl ester coating with excellent chemical resistance.

Flowchem VE GL offers corrosion protection for concrete and metal structures subject to continuous exposure of aggressive chemicals.



Temperature Resistant:

Resistant to intermittent temperatures of up to 350°F.



Chemical Resistant:

Protects against a variety of aggressive acids, solvents caustics and chemicals.



Bond Strength:

Elastomer modified resin provides superior adhesion.



Fast Cure:

Accelerated cure time, providing an operational surface in just 12 hours.



Versatile:

Dimensionally stable, high cohesive strength and low permeability.

Standard Colors:



Red



Gray

Application Suitability:

Solvent Handling and Storage	✓
Explosion Risk Area	✓
Liquid Nitrogen Handling	✓
Tanker Handling Bays	✓
Flue Gas Desulphurisation Process	✓

The applied colors may differ from the examples shown. For a full color chart and samples, contact your local Flowcrete office.

Technical Profile

TEMPERATURE RESISTANCE:

ASTM D3299	Continuous Exposure: 320°F
	Intermittent Spills: 350°F

COMPRESSIVE STRENGTH:

ASTM C 579	17,500 psi
------------	------------

TENSILE STRENGTH:

ASTM D 638	10,000 psi
------------	------------

FLEXURAL STRENGTH:

ASTM D 790	22,000 psi
------------	------------

BARCOL HARDNESS:

ASTM D 2583	>35
-------------	-----

FLEXURAL MODULUS OF ELASTICITY:

ASTM D 790	15.6 x 10 ⁵ psi
------------	----------------------------

ADHESION:

ASTM D 4541	>400 psi (100% Concrete Failure)
-------------	-------------------------------------

POT LIFE:


45+ minutes at 75° F


PERMEABILITY:

ASTM E 96	0.0042 perm. -in
-----------	------------------

SPEED OF CURE:

	60°F	75°F	90°F
Light Traffic	18 hrs	12 hrs	8 hrs
Full Traffic	36 hrs	24 hrs	16 hrs
Full Chemical Cure	72 hrs	48 hrs	24 hrs

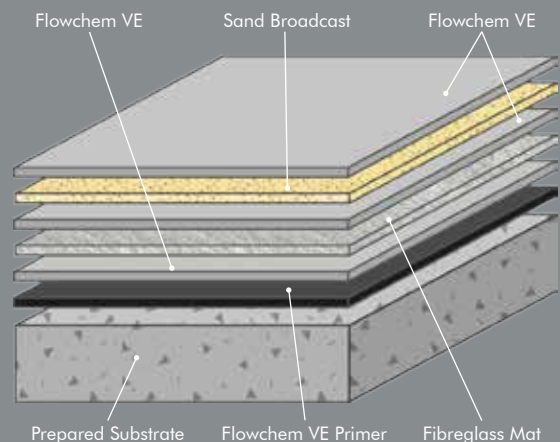

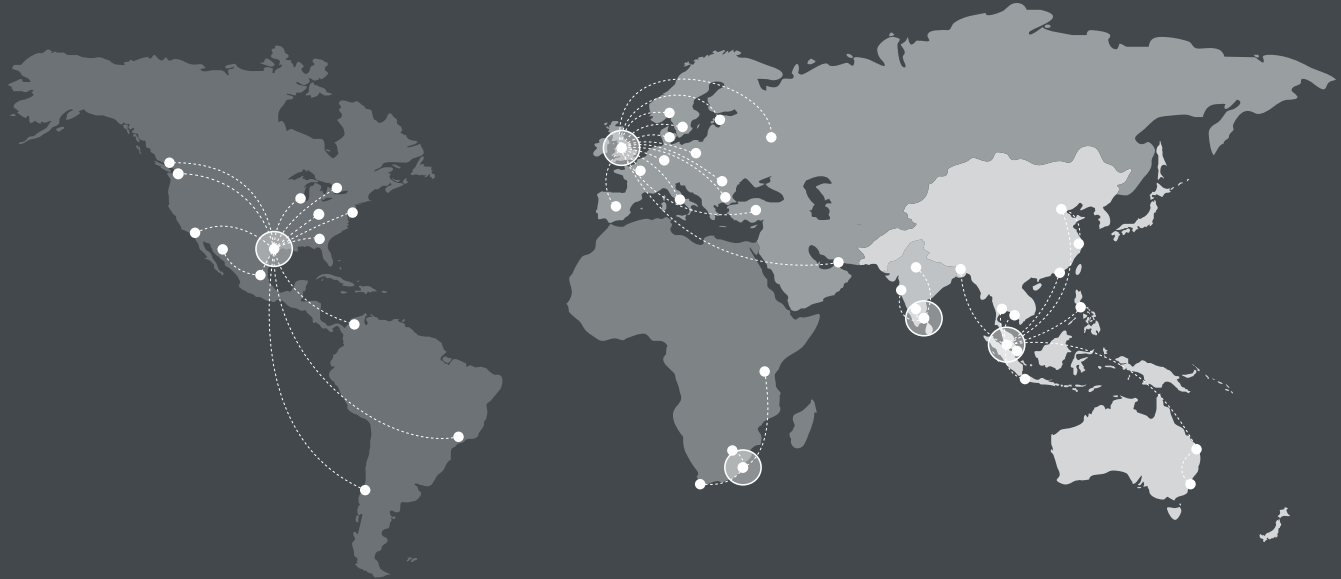

Flowcrete

Flowcrete is the world's leading manufacturer of seamless resin floor, wall and coving solutions as well as a range of other specialist coating technologies with operations across the globe.

Europe & Middle East

Baltic States	+48 883 303 880	latvia@flowcrete.com
Bulgaria	+359 898 61 58 31	bulgaria@flowcrete.com
Denmark	+46 435 40 01 10	denmark@flowcrete.com
France	+33 1 60 61 74 42	france@flowcrete.com
Germany	+49 6119 016645	germany@flowcrete.com
Italy	+39 339 4853258	italy@flowcrete.com
Norway	+47 64 86 08 30	norway@flowcrete.com
Poland	+48 22 879 89 07	poland@flowcrete.com
Romania	+48 883 303 880	romania@flowcrete.com
Russia	+7 495 645 83 18	rus@flowcrete.com
Spain	+34 937 07 0872	spain@flowcrete.com
Sweden	+46 435 40 01 10	sweden@flowcrete.com
Turkey	+90 532 416 66 52	turkey@flowcrete.com
UAE	+971 4 886 4728	uae@flowcrete.com
UK	+44 1270 753 000	uk@flowcrete.com

Africa

East Africa	+254 20 682 1011	eastafrika@flowcrete.com
South Africa	+27 31 461 3411	southafrica@flowcrete.com

India

India	+91 44 4202 9831	india@flowcrete.com
-------	------------------	---------------------

Asia Pacific

Australia	+61 7 3205 7115	australia@flowcrete.com
Bangladesh	+88 02 9857222	bangladesh@flowcrete.com
China	+86 10 8472 1912	china@flowcrete.com
Hong Kong	+852 2795 0478	hongkong@flowcrete.com
Indonesia	+62 21 252 3201	indonesia@flowcrete.com
Malaysia	+60 3 6277 9575	malaysia@flowcrete.com
Philippines	+63 917 514 2696	philippines@flowcrete.com
Singapore	+65 6848 7166	singapore@flowcrete.com
Thailand	+66 2539 3424	thailand@flowcrete.com
Vietnam	+84 8 6287 0846	vietnam@flowcrete.com

Americas

Brazil	+55 11 3230 1107	brazil@flowcrete.com
Canada	+1 800 218 1850	canada@flowcrete.com
Chile	+56 2 2938 1962	chile@flowcrete.com
Colombia	+57 1 381 9254	colombia@flowcrete.com
Mexico	+01 800 099 0468	mexico@flowcrete.com
USA	+1 936 539 6700	usa@flowcrete.com

*Whilst every care has been taken to ensure that the information included in this document was accurate at the time of printing, Flowcrete reserves the right to change product specifications at any time without prior notice. The photographs and colours reproduced in this publication are within the constraints of the printing process and are not to be used for matching purposes. All photographs are used for approximate representation only and may not show the actual products on offer. E&OE.