

Flowcrete

for the world at your feet



MONDÉCO

Decorative Terrazzo Flooring:

- ✓ Shopping Malls
- ✓ Leisure Venues
- ✓ Airport Terminals
- ✓ Corporate Offices
- ✓ Healthcare Facilities
- ✓ Pharmaceutical



Welcome to Flowcrete Americas

Flowcrete is a world leader in the manufacture of seamless resin flooring systems for application in both industrial and commercial environments.

Flowcrete Americas has a fresh approach to flooring and is constantly looking to introduce world-class systems, which offer clients a number of performance advantages while at the same time make floors much more than a surface to walk on.

Flowcrete Americas is dedicated to innovating sustainable flooring materials and using the earth's natural resources responsibly across all operations to ensure a more positive impact on the construction industry and a greener world at our feet.

The company's headquarters in Texas serves expanding business opportunities across the continent including the USA, Canada, Latin America and the Caribbean. With key clients including Coca Cola, L'Oréal, Cargill, Nestlé, NASA, GE and Southwest Airlines, Flowcrete Americas continues to develop a significant presence in the Americas' polymer flooring market.

Introduction to the Mondéco Range




Flowcrete's polymer terrazzo flooring range, Mondéco, is the optimum flooring material for large-scale commercial environments owing to its eye-catching and durable finish.

Terrazzo flooring dates back to Ancient Rome where its vibrant, wear-resistant and flexible qualities proved popular with architects building the first modern empire.

Today terrazzo remains the first-choice for designers across the globe. Offering a decorative mix of aggregates ranging from sparkling mirror glass, mother-of-pearl and marble through to durable flint and granite chippings, the Mondéco range is the designer's dream for all interior flooring projects.



Creative Design Potential

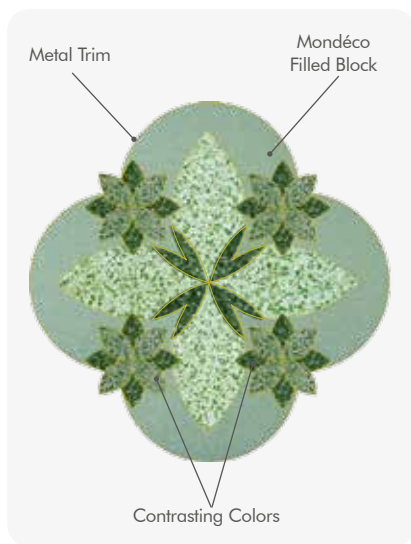

Perhaps the greatest benefit of terrazzo for architects and interior designers is how flexible the material can be in terms of its application in design.

Mondéco can be installed in a variety of complicated patterns and precision cut forms using brass or aluminum trims, which are laid on the surface of the floor in a matrix that designates each area of the design. Mondéco is simply used to fill each colour block before the whole surface is ground to reveal the stunning design.

Custom color blends are available to create a bold, unique and eye-catching floor finish.

Mondéco Application Suitability



Shopping
Malls



Leisure
Venues



Airport
Terminals



Corporate
Offices



Healthcare
Facilities



Pharmaceutical
Production

Mondéco Crystal (1/3")

A seamless, decorative and durable epoxy resin terrazzo containing a blend of clear and mirror glass aggregates.

Mondéco Crystal provides a stunning floor surface in commercial environments prioritising aesthetics, wear resistance and durability.



Decorative:

Available in a range of recycled clear and mirror glass aggregate blends.



Easily Cleaned:

Minimal surface joints ensure the floor is easy to clean and sanitize.



Wear Resistant:

Excellent scratch and wear resistance to heavy foot and rubber-wheeled cart traffic.



Stain Resistant:

Protects against spillages in large-scale leisure and commercial venues.



Lifecycle Cost Efficiencies:

Offers significant lifecycle cost savings compared to tile or vinyl floor finishes.

Standard Colors:



Oyster White



Dusty Gray



Agate Gray



Provence Blue

Technical Profile

COVERAGE RATES: (225 LB UNIT)

50 sq ft/unit at 3/8"

COMPRESSIVE STRENGTH:

ASTM C 579 9,425 psi

TENSILE STRENGTH:

ASTM C 307 1,885 psi

FLEXURAL STRENGTH:

ASTM C 580 3,625 psi

SLIP RESISTANCE:

BS 7976-2 Dry: 80

ABRASION RESISTANCE:

BS 8204-2 Class AR2- Medium duty industrial and commercial

WEAR RESISTANCE:

EN 13892-4 Max. wear depth < 50 µm

IMPACT RESISTANCE:

EN ISO 6272 > 160 inch pounds

BOND STRENGTH:

ASTM D 4541 > 220 psi

TEMPERATURE RESISTANCE:

Continuous Exposure: 140°F


VOC: 10 g/l

SPEED OF CURE: 50°F 70°F 90°F

Light Traffic 24 hrs 16 hrs 10 hrs

Full Traffic 72 hrs 48 hrs 36 hrs

Full Chemical Cure 12 days 7 days 4 days

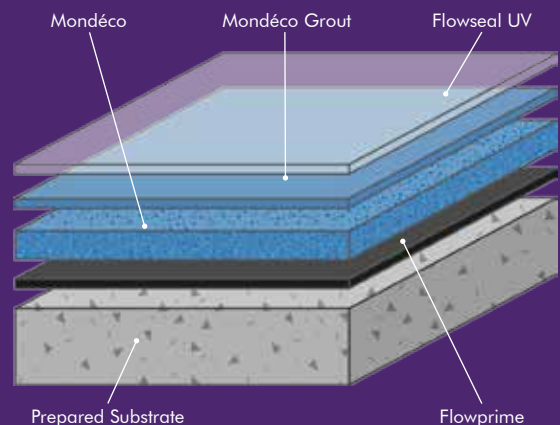

The applied colors may differ from the examples shown. For a full color chart and samples, contact your local Flowcrete office.



Application Suitability

Retail & Grocery Stores	✓
Shopping Malls	✓
Leisure Venues	✓
Offices & Education Facilities	✓
Airport Terminals	✓
Stadium Buildings	✓
Transportation & Railways	✓
Healthcare Facilities	
Pharmaceutical Plants	

Mondéco Classic (1/3")

A seamless, decorative and durable epoxy resin terrazzo containing a blend of marble aggregates.

Mondéco Classic provides a decorative floor surface in commercial environments prioritizing aesthetics, wear resistance and durability.



Decorative:

Available in a range of decorative marble aggregate blends to impress underfoot.



Easily Cleaned:

Minimal surface joints ensure the floor is easy to clean and sanitize.



Wear Resistant:

Excellent scratch and wear resistance to heavy foot and rubber-wheeled cart traffic.



Stain Resistant:

Protects against spillages in large-scale leisure and commercial venues.



Lifecycle Cost Efficiencies:

Offers significant lifecycle cost savings compared to tile or vinyl floor finishes.

Standard Colors:



Dawn - Oyster White



Dawn - Dusty Gray



Dawn - Agate Gray




Dawn - Provence Blue



Dusk - Oyster White



Dusk - Dusty Gray



Dusk - Agate Gray



Dusk - Provence Blue

Technical Profile

COVERAGE RATES: (225 LB UNIT)

50 sq ft/unit at 3/8"

COMPRESSIVE STRENGTH:

ASTM C 579 9,425 psi

TENSILE STRENGTH:

ASTM C 307 1,885 psi

FLEXURAL STRENGTH:

ASTM C 580 3,625 psi

SLIP RESISTANCE:

BS 7976-2 Dry: 80

ABRASION RESISTANCE:

BS 8204-2 Class AR2- Medium duty industrial and commercial

WEAR RESISTANCE:

EN 13892-4 Max. wear depth < 50 µm

IMPACT RESISTANCE:

EN ISO 6272 > 160 inch pounds

BOND STRENGTH:

ASTM D 4541 > 220 psi

TEMPERATURE RESISTANCE:

Continuous Exposure: 140°F


VOC: 10 g/l

SPEED OF CURE: 50°F 70°F 90°F

Light Traffic 24 hrs 16 hrs 10 hrs

Full Traffic 72 hrs 48 hrs 36 hrs

Full Chemical Cure 12 days 7 days 4 days

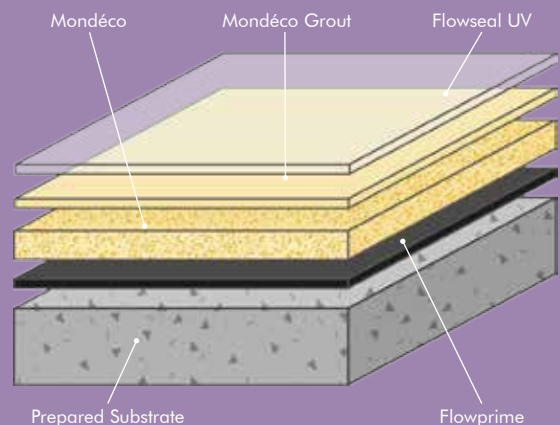

The applied colors may differ from the examples shown. For a full color chart and samples, contact your local Flowcrete office.

Mondéco Exotic (1/3")

A seamless epoxy resin terrazzo containing a blend of mother of pearl, marble and mirror glass aggregates.

Mondéco Exotic provides a colorful floor surface in commercial environments prioritizing aesthetics, wear resistance and durability.



Decorative:

Available in a range of mother of pearl, marble and mirror glass aggregates.



Easily Cleaned:

Minimal surface joints ensure the floor is easy to clean and sanitize.



Wear Resistant:

Excellent scratch and wear resistance to heavy foot and rubber-wheeled cart traffic.



Stain Resistant:

Protects against spillages in large-scale leisure and commercial venues.



Lifecycle Cost Efficiencies:

Offers significant lifecycle cost savings compared to tile or vinyl floor finishes.

Standard Colors:



Ice - Oyster White



Ice - Dusty Gray




Ice - Agate Gray



Ice - Provence Blue



Pearl - Oyster White



Pearl - Dusty Gray



Pearl - Agate Gray



Pearl - Provence Blue

Technical Profile

COVERAGE RATES: (225 LB UNIT)

50 sq ft/unit at 3/8"

COMPRESSIVE STRENGTH:

ASTM C 579 9,425 psi

TENSILE STRENGTH:

ASTM C 307 1,885 psi

FLEXURAL STRENGTH:

ASTM C 580 3,625 psi

SLIP RESISTANCE:

BS 7976-2 Dry: 80

ABRASION RESISTANCE:

BS 8204-2 Class AR2- Medium duty industrial and commercial

WEAR RESISTANCE:

EN 13892-4 Max. wear depth < 50 µm

IMPACT RESISTANCE:

EN ISO 6272 > 160 inch pounds

BOND STRENGTH:

ASTM D 4541 > 220 psi

TEMPERATURE RESISTANCE:

Continuous Exposure: 140°F


VOC: 10 g/l

SPEED OF CURE: 50°F 70°F 90°F

Light Traffic 24 hrs 16 hrs 10 hrs

Full Traffic 72 hrs 48 hrs 36 hrs


Full Chemical Cure 12 days 7 days 4 days

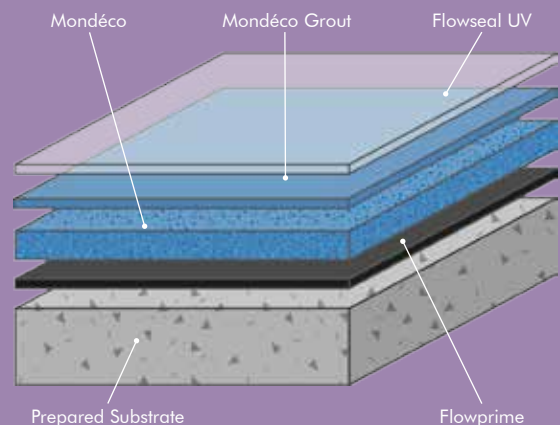

The applied colors may differ from the examples shown. For a full color chart and samples, contact your local Flowcrete office.

Application Suitability

Retail & Grocery Stores	
Shopping Malls	
Leisure Venues	
Offices & Education Facilities	✓
Airport Terminals	
Stadium Buildings	✓
Transportation & Railways	✓
Healthcare Facilities	✓
Pharmaceutical Plants	✓

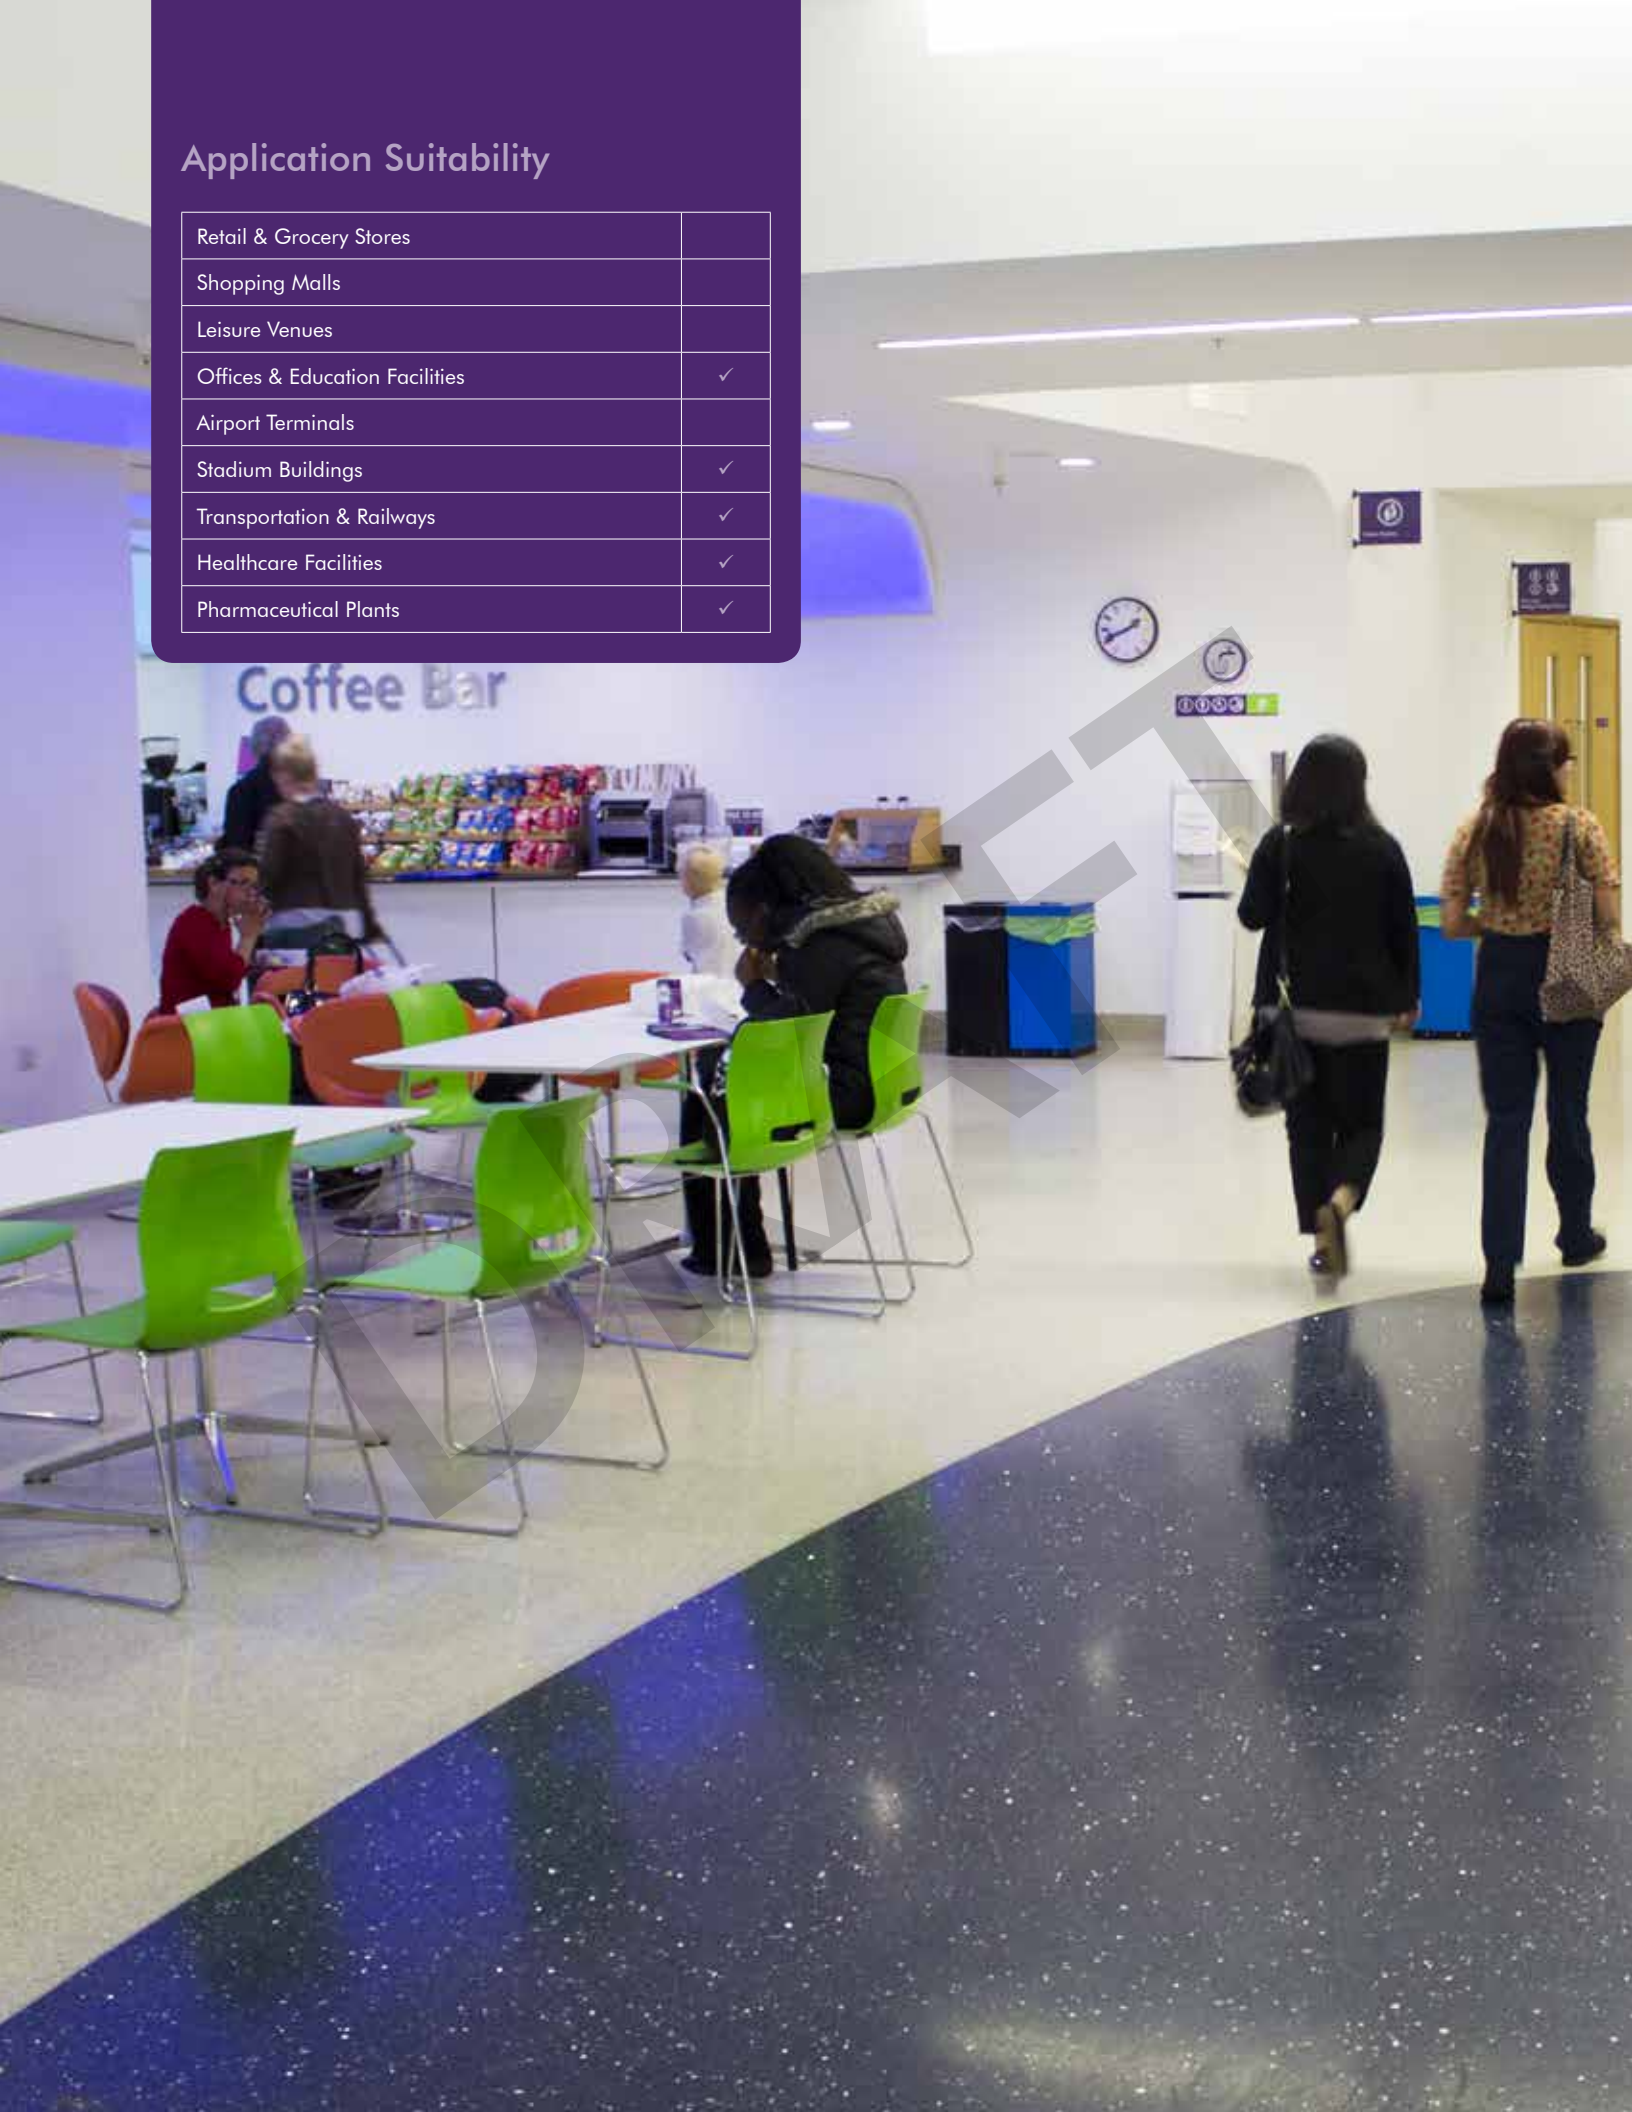

Mondéco Earth (1/3")

A seamless, decorative and heavy duty epoxy resin terrazzo containing durable flint aggregates.

Mondéco Earth provides an easily cleaned, chemical resistant floor finish suited to use in pharmaceutical production and process facilities.



Decorative:

Available in a decorative range of durable flint aggregate blends for strength underfoot.



Chemical Resistant:

Protects against acids, alkalis, sanitizers, chemical solvents, salt and sugar solutions.



Polygiene®:

Contains a silver ion antimicrobial additive to protect the surface.



Easily Cleaned:

Minimal surface joints ensure the floor is easy to clean and sanitize.



Lifecycle Cost Efficiencies:

Offers significant lifecycle cost savings compared to tile or vinyl floor finishes.

Standard Colors:



Provence



Coconut



Dusty Gray



Agate Gray



Oyster White



Chilli Pepper

The applied colors may differ from the examples shown. For a full color chart and samples, contact your local Flowcrete office.

Technical Profile

COVERAGE RATES: (165 LB UNIT)

50 sq ft/unit at 3/8"

COMPRESSIVE STRENGTH:

ASTM C 579 9,425 psi

TENSILE STRENGTH:

ASTM C 307 1,885 psi

FLEXURAL STRENGTH:

ASTM C 580 3,625 psi

SLIP RESISTANCE:

BS 7976-2 Dry: 80

ABRASION RESISTANCE:

BS 8204-2 Class AR2- Medium duty industrial and commercial

WEAR RESISTANCE:

EN 13892-4 Max. wear depth < 50 µm

IMPACT RESISTANCE:

EN ISO 6272 > 160 inch pounds

BOND STRENGTH:


ASTM D 4541 > 220 psi

TEMPERATURE RESISTANCE:

Continuous Exposure: 140°F

VOC: 10 g/l

SPEED OF CURE:	50°F	70°F	90°F
Light Traffic	24 hrs	16 hrs	10 hrs
Full Traffic	72 hrs	48 hrs	36 hrs
Full Chemical Cure	12 days	7 days	4 days

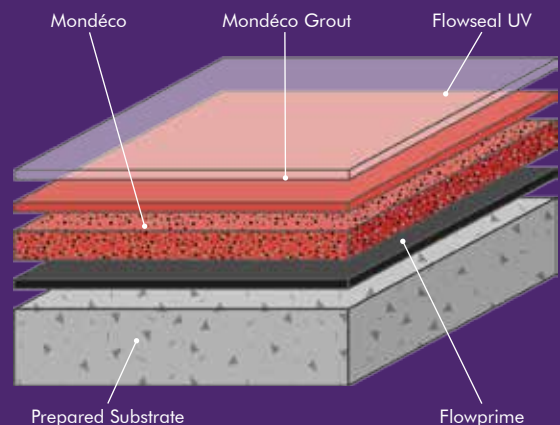

Mondéco TZ (1/4")

A trowel-applied, granite filled antimicrobial treated cementitious urethane terrazzo flooring system.

Mondéco TZ contains granite within a cementitious urethane binder, providing a smooth finish suited to use in pharmaceutical facilities.



Polygiene®:

Contains a silver ion antimicrobial additive to protect the surface.



Decorative:

Available in a wide-range of decorative colors, patterns and aggregate blends.



Temperature Resistant:

Resistant to temperatures of up to 250°F and suitable for steam cleaning.



Chemical Resistant:

Protects against acids, alkalis, sanitizers, chemical solvents, salt and sugar solutions.



Lifecycle Cost Efficiencies:

Offers significant lifecycle cost savings compared to tile or vinyl floor finishes.

Standard Colors:



Cream



Mustard



Dark Green



Ochre




Mid Gray



Tile Red

Technical Profile

COVERAGE RATES: (52.5 LB UNIT)			
1.4 sq ft/unit at 3/8"			
COMPRESSIVE STRENGTH:			
ASTM C 579	8,000 psi		
TENSILE STRENGTH:			
ASTM C 307	1,200 psi		
FLEXURAL STRENGTH:			
ASTM C 580	3,000 psi		
ABRASION RESISTANCE:			
ASTM D 4060 H22 Wheel, 1000 cycles	0.2g loss		
SLIP RESISTANCE:			
BS 7976-2	Dry: 80		
ABRASION RESISTANCE:			
BS 8204-2	Class AR2- Medium duty industrial and commercial		
WEAR RESISTANCE:			
EN 13892-4	Max. wear depth < 50 µm		
IMPACT RESISTANCE:			
EN ISO 6272	175 inch pounds		
BOND STRENGTH:			
ASTM D 4541	>220 psi		
TEMPERATURE RESISTANCE:			
Continuous Exposure:	220°F		
Intermittent Spills:	250°F		
VOC:	10 g/l		
SPEED OF CURE:	50°F	70°F	90°F
Light Traffic	24 hrs	16 hrs	10 hrs
Full Traffic	72 hrs	48 hrs	36 hrs
Full Chemical Cure	12 days	7 days	4 days

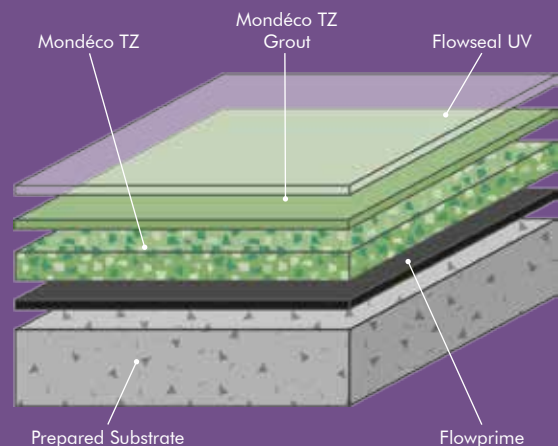


The applied colors may differ from the examples shown. For a full color chart and samples, contact your local Flowcrete office.



Application Suitability

Retail & Grocery Stores	
Shopping Malls	
Leisure Venues	
Offices & Education Facilities	✓
Airport Terminals	
Stadium Buildings	
Transportation & Railways	
Healthcare Facilities	✓
Pharmaceutical Plants	✓

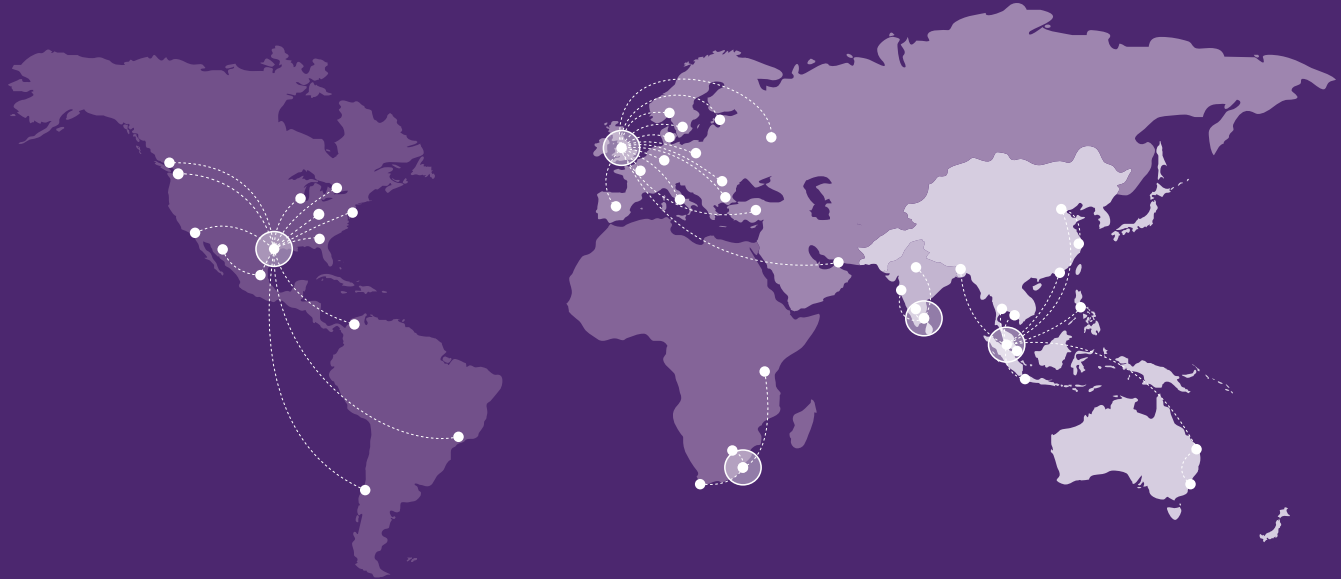

Flowcrete

Flowcrete is the world's leading manufacturer of seamless resin floor, wall and coving solutions as well as a range of other specialist coating technologies with operations across the globe.

Europe & Middle East

Baltic States	+48 883 303 880	latvia@flowcrete.com
Bulgaria	+359 898 61 58 31	bulgaria@flowcrete.com
Denmark	+46 435 40 01 10	denmark@flowcrete.com
France	+33 1 60 61 74 42	france@flowcrete.com
Germany	+49 6119 016645	germany@flowcrete.com
Italy	+39 339 4853258	italy@flowcrete.com
Norway	+47 64 86 08 30	norway@flowcrete.com
Poland	+48 22 879 89 07	poland@flowcrete.com
Romania	+48 883 303 880	romania@flowcrete.com
Russia	+7 495 645 83 18	rus@flowcrete.com
Spain	+34 937 07 0872	spain@flowcrete.com
Sweden	+46 435 40 01 10	sweden@flowcrete.com
Turkey	+90 532 416 66 52	turkey@flowcrete.com
UAE	+971 4 886 4728	uae@flowcrete.com
UK	+44 1270 753 000	uk@flowcrete.com

Africa

East Africa	+254 20 682 1011	eastafrika@flowcrete.com
South Africa	+27 31 461 3411	southafrica@flowcrete.com

India

India	+91 44 4202 9831	india@flowcrete.com
-------	------------------	---------------------

Asia Pacific

Australia	+61 7 3205 7115	australia@flowcrete.com
Bangladesh	+88 02 9857222	bangladesh@flowcrete.com
China	+86 10 8472 1912	china@flowcrete.com
Hong Kong	+852 2795 0478	hongkong@flowcrete.com
Indonesia	+62 21 252 3201	indonesia@flowcrete.com
Malaysia	+60 3 6277 9575	malaysia@flowcrete.com
Philippines	+63 917 514 2696	philippines@flowcrete.com
Singapore	+65 6848 7166	singapore@flowcrete.com
Thailand	+66 2539 3424	thailand@flowcrete.com
Vietnam	+84 8 6287 0846	vietnam@flowcrete.com

Americas

Brazil	+55 11 3230 1107	brazil@flowcrete.com
Canada	+1 800 218 1850	canada@flowcrete.com
Chile	+56 2 2938 1962	chile@flowcrete.com
Colombia	+57 1 381 9254	colombia@flowcrete.com
Mexico	+01 800 099 0468	mexico@flowcrete.com
USA	+1 936 539 6700	usa@flowcrete.com

*Whilst every care has been taken to ensure that the information included in this document was accurate at the time of printing, Flowcrete reserves the right to change product specifications at any time without prior notice. The photographs and colours reproduced in this publication are within the constraints of the printing process and are not to be used for matching purposes. All photographs are used for approximate representation only and may not show the actual products on offer. E&OE.